




**DATA SHEET**

# SV5C-DPTX

MIPI D-PHY Generator

**C SERIES**

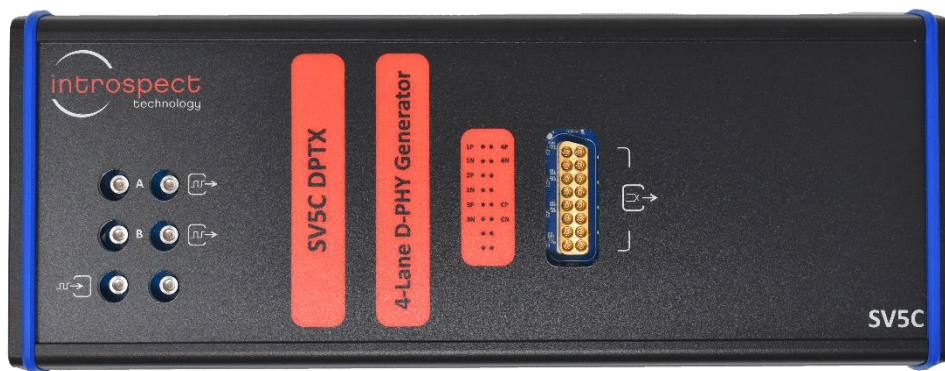

## Table of Contents

Introduction.....	3
Overview .....	3
Key Benefits .....	3
Applications .....	3
Physical Connections.....	4
MXP High Speed Connector Pinout.....	4
Low Speed GPIO Connector Pinout .....	5
Ordering Information.....	5
Specifications .....	6

# Introduction

## OVERVIEW

The SV5C-DPTX MIPI D-PHY Generator is an ultra-portable, high-performance instrument that enables characterization and validation of MIPI D-PHY receiver ports. The instrument operates over a continuous range of data rates and includes analog parameter controls that enable deep insights into receiver voltage sensitivity, receiver skew and jitter tolerance for receiver stress-testing.

The instrument operates with the easy-to-use, highly versatile Pinetree software environment for automated physical layer compliance testing. Pinetree also includes pattern synthesis tools that enable the generation of complete DSI-2 or CSI-2 packets such as color bars and active image frames for system-level test.

This document describes the electrical characteristics and key specifications of the D-PHY Generator. Please refer to User Manual documentation for operating instructions.

## KEY BENEFITS

- Any-rate operation to 12.5 Gbps per lane (D-PHY)
- Per-lane HS voltage level and common-mode control
- Per-lane LP voltage level control
- Per-lane skew injection with < 1 ps resolution
- Per-lane multi-source jitter injection
- State-of-the-art programming environment based on the highly intuitive Python language

## APPLICATIONS

- Parallel physical layer validation
- DSI and CSI packet and protocol testing
- Plug-and-play system-level validation

## PHYSICAL CONNECTIONS

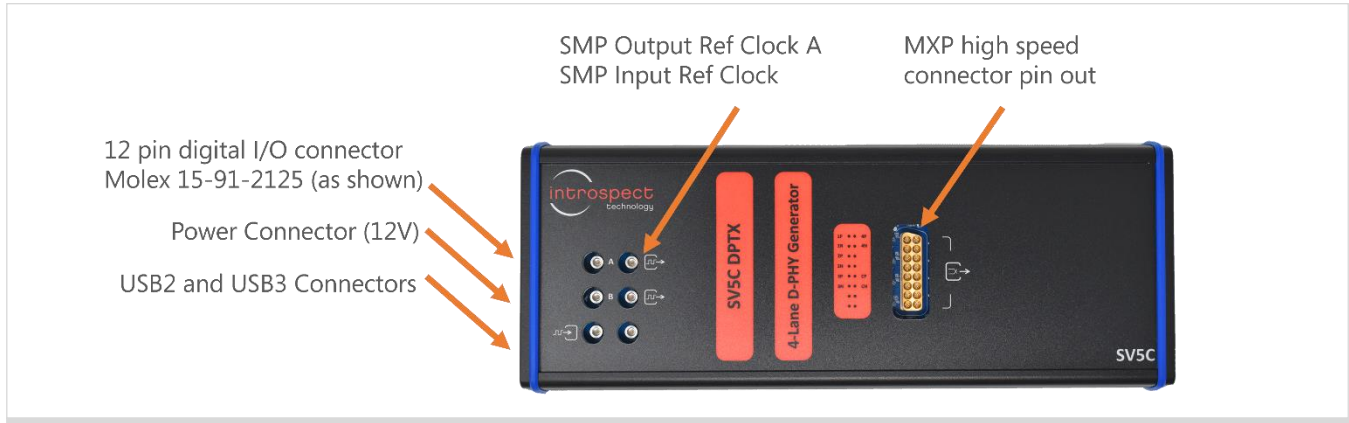


Figure 1: SV5C-DPTX physical connections

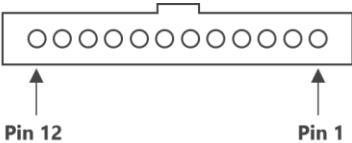
## MXP HIGH SPEED CONNECTOR PINOUT

TABLE 1: SIGNAL MAPPING OF THE MXP CONNECTOR FOR SV5C-DPTX

		MXP PIN	D-PHY PINOUT
<p>MXP Top View</p>		1	Lane 1 P
		2	Lane 1 N
		3	Lane 2 P
		4	Lane 2 N
		5	Lane 3 P
		6	Lane 3N
		7	NC
		8	NC
		9	Lane 4 P
		10	Lane 4 N
		11	NC
		12	NC
		13	CLK P
		14	CLK N
		15	NC
		16	NC

## LOW SPEED GPIO CONNECTOR PINOUT

TABLE 2: GPIO CONNECTOR PINOUT

CONNECTOR	PIN	INPUT/OUTPUT	FUNCTION
<p>12 pin GPIO connector Molex 15-91-2125</p>  <p>A weak internal pull-up is present on all pins except ground. All pins use 1.8 V LVCMOS logic (specifications in Table 11).</p>	1	Configurable	GPIO[0]
	2	Configurable	GPIO[1]
	6	Configurable	GPIO[2]
	7	Configurable	GPIO[3]
	8	Input Only	SV5C reset pin, active low ("0" = reset, "1" = not in reset) Minimum pulse width = 50 ns
	9	-	I2C SCL Master Software controlled
	10	-	I2C SDA Master Software controlled
	11	Input Only	Tearing effect input Rising edge triggered
	12	-	Ground

## ORDERING INFORMATION

TABLE 3: ITEM NUMBERS FOR THE SV5C-DPTX AND RELATED PRODUCTS

PART NUMBER	NAME	KEY DIFFERENTIATORS
5782	SV5C-DPTX	D-PHY only (this data sheet)
5783	SV5C-CPTX	C-PHY only
5786	SV5C-DPTXCPTX	Supports both D-PHY and C-PHY
5793	SV5C TX PHY Upgrade	License to add the C-PHY functionality

# Specifications

TABLE 4: GENERAL SPECIFICATIONS

PARAMETER	VALUE	UNITS	DESCRIPTION AND CONDITIONS
<b>Application / Protocol Support</b>			
Physical layer interface	D-PHY		
MIPI protocol	CSI/DSI		Flexible pattern architecture allows for the generation of encoded PHY data, unencoded PHY data, or entire CSI/DSI frames
LP/HS Handling	Automatic		Automatically generates LP and HS data
<b>Ports</b>			
Number of D-PHY Lanes	4 Lanes and CLK		Supports embedded clock for MIPI D-PHY v3.5
Number of Dedicated Output Reference Clocks	1		Individually synthesized frequency and output format
Number of Dedicated Input Reference Clocks	1		Used as external reference clock input
Number of Trigger Inputs	2		Via Molex connector
Number of Flag Outputs	2		Via Molex connector
Number of I2C/I3C Masters	1		Via Molex connector
Connections to PC for accessing Pinetree	2		USB2 and USB3
<b>Power Consumption</b>			
DC Input Voltage	12	Volt	
Current Draw	8	Amp	9.0 Gbps / 4 Lane D-PHY operation

TABLE 5: DATA RATES AND REFERENCE CLOCKS

PARAMETER	VALUE	UNITS	DESCRIPTION AND CONDITIONS
<b>Data Rates and Frequencies</b>			
Minimum Programmable Data Rate	80	Mbps	
Maximum Programmable Data Rate	9.0	Gbps	Upgradable to 12.5 Gbps through a license key
Frequency Resolution of Programmed Data Rate	1	kHz	
Minimum External Input Clock Frequency	10	MHz	
Maximum External Input Clock Frequency	250	MHz	
Supported External Input Clock I/O Standards			LVDS (typical 400 mVpp input) LVPECL (typical 800 mVpp input)
Minimum Output Clock Frequency	10	MHz	
Maximum Output Clock Frequency	250	MHz	
Output Clock Frequency Resolution	1	kHz	
Supported External Output Clock I/O Standards			LVDS, LVPECL, CML, HCSL, and LVCMOS

TABLE 6: HS VOLTAGE CHARACTERISTICS

PARAMETER	VALUE	UNITS	DESCRIPTION AND CONDITIONS
<b>Output Coupling</b>			
Output Differential Impedance	100	Ohm	
Differential Impedance Tolerance	+/- 10	Ohm	
Output Single-Ended Impedance	50	Ohm	
Single-Ended Impedance Tolerance	+/- 5	Ohm	
<b>HS Voltage Performance</b>			
Minimum Output Voltage Amplitude	20	mV	Differential
Maximum Output Voltage Swing Amplitude	600	mV	Differential
Voltage Swing Resolution	20	mV	Differential
Voltage Swing Accuracy	>5% or 10 mV	%, mV	
Minimum Common Mode Voltage	-100	mV	
Maximum Common Mode Voltage	500	mV	
Common Mode Voltage Resolution	1	mV	
Common Mode Voltage Accuracy	>5% or 10 mV	%, mV	
Rise and Fall Time	50	ps	Typical, 20% to 80%
Swing and Common Mode Setting	Per Lane		



TABLE 7: LP VOLTAGE CHARACTERISTICS

PARAMETER	VALUE	UNITS	DESCRIPTION AND CONDITIONS
<b>LP Voltage Controls</b>			
Minimum Programmable LP Logic High Level	0	mV	
Maximum Programmable LP Logic High Level	1300	mV	
Minimum Programmable LP Logic Low Level	-100	mV	
Maximum Programmable LP Logic Low Level	600	mV	
Logic Level Control Resolution	1	mV	
Logic Level Accuracy	>2% or 5 mV	%, mV	

TABLE 8: HS JITTER AND NOISE CHARACTERISTICS

PARAMETER	VALUE	UNITS	DESCRIPTION AND CONDITIONS
<b>Jitter and Noise Performance</b>			
Random Jitter (RMS)	< 1.7	ps rms	Differential
Minimum Frequency of Injected Deterministic Jitter	0.1	kHz	
Maximum Frequency of Injected Deterministic Jitter	50	MHz	
Frequency Resolution of Injected Deterministic Jitter	0.1	kHz	
Maximum Peak to Peak Deterministic Jitter	2	UI	D-PHY numerically generated, tested to 1000 ps
Magnitude Resolution of Injected Deterministic Jitter	500	fs	
Accuracy of Injected Deterministic Jitter	> 10% or 10 ps	%, ps	
Common Mode Noise Injection Minimum Sinusoidal Frequency	1	MHz	
Common Mode Noise Injection Maximum Sinusoidal Frequency	1	GHz	
Common Mode Noise Injection Maximum Sinusoidal Amplitude	1000	mV	Measured single ended

TABLE 9: HS CHANNEL SKEW CHARACTERISTICS

PARAMETER	VALUE	UNITS	DESCRIPTION AND CONDITIONS
<b>Channel Skew Performance</b>			
Coarse Skew Range: Minimum Programmable Skew, in Integer UI	-20	UI	Lane to Lane
Coarse Skew Range: Maximum Programmable Skew, in Integer UI	+20	UI	Lane to Lane
Coarse Skew Resolution 1.0 Gbps / 1.0 Gsps	0.125	UI	Lane to Lane
Fine Skew Range: Minimum Programmable Skew	-500	ps	HS Clock to Data
Fine Skew Range: Maximum Programmable Skew	+500	ps	HS Clock to Data
Fine Skew Injection Resolution	1	ps	

TABLE 10: HS PATTERN HANDLING CHARACTERISTICS

PARAMETER	VALUE	UNITS	DESCRIPTION AND CONDITIONS
<b>User-Programmable Pattern Memory</b>			
Minimum Pattern Segment Size	8	Bits	
Maximum Pattern Segment Size	8	GBytes	
Total Memory Space for Transmitters	8	GBytes	
<b>Pattern Sequencer</b>			
Sequence Control	Yes		Loop infinite Loop-on-count (see count below) Play to end
Number of Sequencer Slots per Pattern Generator	16		Each pattern generator can string up to 16 different segments together, each with its own repeat count
Number of Entry Slots	1		Separate from above 16 segments
Number of Exit Slots	1		Separate from above 16 segments
Maximum Repeat Count Per Slot	65536		
Maximum Repeat Count for Outer Loop	65536		Outer loop can encompass any number of slots
<b>Additional Pattern Characteristics</b>			
Escape Mode Command Entry	Yes		Per Lane
Pattern Switching	Yes		Wait to end of segment, or immediate

TABLE 11: GPIO AND I2C VOLTAGE CHARACTERISTICS

PARAMETER	VALUE	UNITS	DESCRIPTION AND CONDITIONS
<b>Voltage</b>			
Voltage Level	1.8	V	All GPIOs operate at 1.8 V LVCMOS
V <sub>IL</sub> minimum	-0.3	V	
V <sub>IL</sub> maximum	0.6	V	
V <sub>IH</sub> minimum	1.2	V	
V <sub>IH</sub> maximum	2.1	V	
V <sub>OL</sub> maximum	0.45	V	
V <sub>OH</sub> minimum	1.35	V	



REVISION NUMBER	HISTORY	DATE
1.0	Document release	August 15, 2023

The information in this document is subject to change without notice and should not be construed as a commitment by Introspect Technology. While reasonable precautions have been taken, Introspect Technology assumes no responsibility for any errors that may appear in this document.



© Introspect Technology, 2023  
Published in Canada on August 21, 2023  
EN-D039E-E-23234

**INTROSPECT.CA**