




**DATA SHEET**

# PV1PSU

Power Supply Unit for PVI Universal Active Probes

**C SERIES**

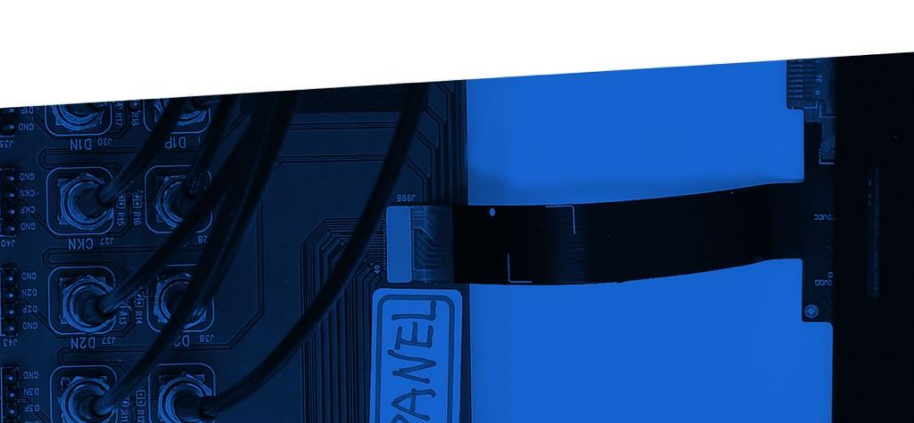

## Table of Contents

Introduction .....	3
Benefits .....	3
Features .....	3
Ports and Connectors .....	3
Specifications .....	4

## Introduction

The PV1PSU is a power supply unit that is used in conjunction with the PV1 Universal Active Probe from Introspect Technology. Specifically, the PV1PSU provides a standalone power source that allows the PV1 to be connected to any oscilloscope or spectrum analyzer. This way, the PV1 is completely agnostic to test instrument vendors, and it can be used to measure low-voltage signals with ease and convenience.


## BENEFITS

- Allows for PV1 probe attachment to any 50 Ohm instrument
- Powers 10 probes simultaneously

## FEATURES

- 12 V DC input (AC adapter included)
- Rugged power cable connections with integrated protection
- Low noise voltage rails for superior probe dynamic range

## Ports and Connectors

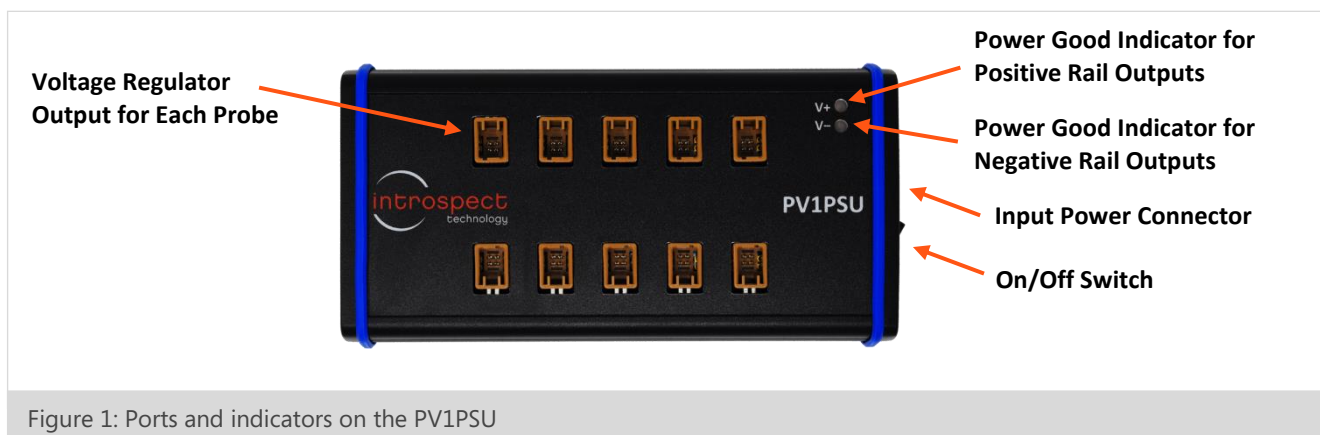

## Specifications

TABLE 1: INPUT AND OUTPUT PROPERTIES

PARAMETER	VALUE	UNITS	DESCRIPTION AND CONDITIONS
<b>Input Power</b>			
DC Input Voltage	12	V	
Power Consumption	20	W	When all PV1 probes are connected
<b>Positive Output Rails</b>			
Voltage Value	4.5	V	Fixed
Current Handling Capability	200	mA	Per output
Output Noise	11	$\mu$ V	RMS
<b>Negative Output Rails</b>			
Voltage Value	-2.6	V	Fixed
Current Handling Capability	-300	mA	Per output
Output Noise	4	$\mu$ V	RMS



Revision Number	History	Date
1.0	Document Release	December 2, 2020

The information in this document is subject to change without notice and should not be construed as a commitment by Introspect Technology. While reasonable precautions have been taken, Introspect Technology assumes no responsibility for any errors that may appear in this document.



© Introspect Technology, 2020  
Published in Canada on December 2, 2020  
EN-D028E-E-E20337

**INTROSPECT.CA**