

P-touch

brother
at your side

Professional Desktop Label Printer

Direct Thermal Series



Jaminan Garansi Resmi 3 Tahun
dari Brother Indonesia


Scan Here





Printer Label Profesional

Cetak label gelang pasien dengan jelas dan langsung di tempat. Mulai dari administrasi hingga kebutuhan pasien lainnya, Printer ID pasien dari Brother diciptakan dengan kualitas terbaik dan tanpa perlu khawatir.

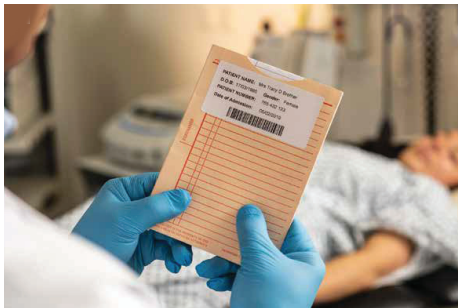

Medis & Laboratorium

Lacak peralatan dan ketepatan standar keamanan rumah sakit. Solusi label Brother membantu Anda untuk mengidentifikasi aset dan mengingatkan Anda untuk perawatan dan pengaturan ulang.



Gelang Pasien

Cetak label gelang pasien dengan jelas dan langsung di tempat. Printer ID pasien dari Brother diciptakan dengan kualitas terbaik dan tanpa perlu khawatir.




Retail

Persiapkan gudang Anda dengan label untuk pengiriman, peralatan, peringatan keselamatan, dan lainnya yang menunjang efisiensi.

Identifikasi Pasien lebih mudah

Seri printer Brother TD-2000 kompatibel dengan gelang pasien yang dapat meminimalisir resiko akibat human error, tulisan tangan yang tak terbaca, ternoda dan pudar, dapat membantu meningkatkan keamanan pasien

- + Material silikon ekstra lembut dan non-alergen tanpa ujung tajam
- + Hasil cetak dengan resolusi tinggi yang mudah dipindai secara akurat
- + Terdapat fitur dual-post snap untuk keamanan ekstra
- + Tahan air dan alkohol untuk memastikan keamanan informasi tetap terjaga
- + Anti bakteri dan telah disetujui oleh FDA

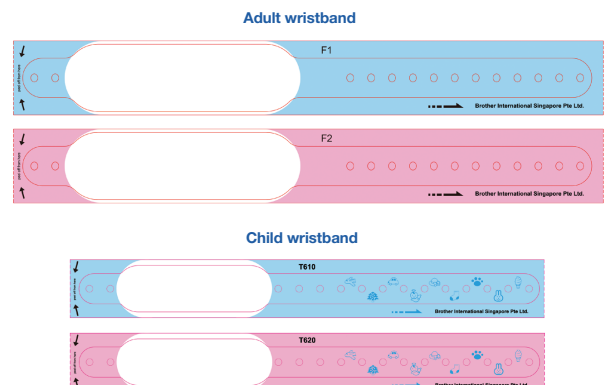



Solusi Software Profesional

Dilengkapi dengan standar software disain dan cetak label profesional yang di kembangkan oleh Brother dengan fitur disain mutakhir.



Dengan aplikasi desain label untuk PC desktop dan perangkat seluler, dan SDK yang terintegrasi semua tipe TD ke dalam aplikasi Anda sendiri, Anda dapat memilih opsi terbaik untuk kebutuhan pencetakan label Anda. Brother menyediakan semua alat yang diperlukan oleh pengembang perangkat lunak untuk mengintegrasikan pencetakan ke dalam aplikasi. Driver printer tersedia untuk OS Windows.

P-touch Editor

Anda dapat membuat label anda sendiri dengan pixel yang presisi dengan menggunakan solusi software yang kuat. Dengan fitur yang mendukung untuk membuat 15 protokol barcode, gambar yang lebih jelas dan gambar grayscales dengan kualitas terbaik, dan kemampuan untuk menyambungkan data yang ada di dalam sheet excel yang berbeda untuk mencetak label, dapat mencetak design label apapun.

Printer Commands

Dengan disupport ZPL II emulation dan tambahan bahasa perintah dasar, pengembang dengan mudah menggabungkan printer dengan sistem yang telah ada sebelumnya.

Template Mode

Disain sesuai dengan kebutuhan dokumen Anda di Windows PC, termasuk logo dan barcode. Sesaat setelah diproses, dokumen akan tersimpan di memory, dan template dapat di ubah sesuai kebutuhan Anda tepat sebelum proses printing dengan perintah sederhana.



**TD-2020****TD-2130N****TD-4410D****TD-4420DN****Printing**

Print Technology	Direct Thermal		
Print Speed	152mm/sec (6 ips)		203mm/sec (8 ips)
Resolution	203dpi	300dpi	203dpi
Max. Print Width	56mm (2.205 inch)		104.1mm
Min. Print Length	6mm (39.37 inch)		Continuous: 6.4mm, Peeler: 12.7mm, Cutter: 20mm, Tear: 27mm
Max. Print Length	1.000mm		3.000mm
Media Sensor Type	Gap (transmissive), Bar (reflective)		Gap (transmissive), Bar (reflective)
Media Sensor Location	Gap (fixed), Reflective (adjustable)		Gap (fixed), Reflective (adjustable)
Tear Off Release Mode	Manual / Auto Cutter		Standard: Continuous, Tear Off - Optional: Peeler, Cutter

Media

Media Types	Wristbands, Receipt, Die-Cut Label, Continuous Length Label		Wristbands, Receipt, Continuous, Die-Cut, Fan Fold, Perforated, Tag
Media Thickness	Without Adhesive: 0.058mm - 0.090mm (0.0023inch to 0.0035inch) With Adhesive: 0.080mm - 0.170mm (0.003inch to 0.007inch)		Without Adhesive: 0.058mm - 0.090mm (0.0023inch to 0.0035inch) With Adhesive: 0.080mm - 0.170mm (0.003inch to 0.007inch)
Media Width	19mm - 63mm (0.7inch to 2.48inch)		19mm - 118.11mm (0.75inch to 4.65inch)
Media Length	12.7mm - 1.000mm (0.5inch to 39.37inch)		6.4mm - 3.000mm (0.25inch to 118.11inch)
Diameter (Max.)	127mm (5inch)		127mm (5inch)
Core Diameter (Max.)	25.4mm (1inch)		12.7mm (0.5inch)

Connectivity

USB	USB Version 2.0 (Full Speed) Type B		
USB Host Capability	No	Yes	No
Serial	Serial RS232C		Serial RS232C (DB9 male)
Wired LAN	Not Supported	10/100BASE-TX	10/100BASE-TX
Wired LAN	No	Yes	No Yes

General

Control Panel	3 Button 1 LED		3 Button 3 LED
LCD Type	n/a		

Power

Adapter	AC Adapter (100 - 240V 50/60Hz)		AC Adapter (100 - 240V 50/60Hz)
---------	---------------------------------	--	---------------------------------

Software

Operating System Support	Windows XP/Vista 7/8/9/10, Linux	WindowsXP/Vista/7/8/9/10, Windows Server 2008/2008R2 /2012/2012R2, Linux	Windows XP/Vista 7/8/9/10, Linux	WindowsXP/Vista/7/8/9/10, Windows Server 2008/2008R2 /2012/2012R2, Linux
Supported Printer Commands	P-Touch Template, ESC/P, ZPL II Emulation		P-Touch Template, ESC/P, Raster, ZPL II Emulation, CPCL Emulation	
Barcode Symbologies	CODE39, CODE128, ECC/EAN-128(GS1-128),ITF(I-2/5),CODABAR(NW-7), UPC-A, UPC-E, EAN13(JAN13), EAN8, GS1 Databar Truncated, GS1 Databar Stacked, GS1 Databar Stacked Omnidirectional, GS1 Databar Limited, GS1 Databar Expanded Stacked, PDF417 (Standard, Truncate, Micro) QRcode (Model 1, Model 2, Micro), Data Matrix (EC200 Square, EC200 Retangular), Maxicode		Linear: CODE39, ITF(I-2/5), EAN-8(JAN8), EAN-13(JAN13), UPC-A,UPC-E, CODABAR (NW-7), CODE128, GS1-128(UCC/EAN128), GS1 Databar (Standar (Omnidirectional)/Truncated/Stacked/Stacked Omnidirectional/Limited/Expanded) CODE93, POSTNET, UPC/EAN EXTENSION, MSI Intelligent Mail Barcode 2-dimensional: QR Code (Model 1, Model 2, Micro QR), Maxicode, PDF417 (Standard, Truncate, MicroPDF417), Data Matrix (ECC200 Square, ECC200 Rectangular) Aztec	
Internal Fonts	Bitmap Fonts: Helsinki, Brussels, Letter Gothic Bold, San Diego, Brougham Outline Fonts: Helsinki, Brussels, Letter Gothic		Bitmap Fonts: Letter Gothic Bold(16,24,32,48dot), Helsinki(16,24,32,48dot), Brussels(24,32,48dot), Brougham(24,32,48dot), San Diego(24,32,48dot), Gothic(16,24,32dot) Outline Fonts: Letter Gothic Regular, Helsinki, Brussels, Gothic(1-40dots), P-touch Template Outline Fonts: Letter Gothic Regular, Helsinki, Brussels, Gothic (1-40dots), Downloadable fonts support via Font Manager Software	

Memory

RAM	8 MB	16 MB	256 MB
Flash	8 MB	8 MB	64 MB

Environmental

Operating Temperature	Operate: 10°C to 35°C		Operate: 5°C to 40°C
Operating Humidity	20 - 80% (No Condensation)		20 - 80% (No Condensation, Max Wet Bulb Temperature 27°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)		-4°F to 140°F (-20°C to 60°C)
Storage Humidity	20 - 80% (No Condensation)		10 - 90% (No Condensation)

Weight and Dimensions

Dimensions (mm)	173(w) x 229(d) x 158(h)		180(w) x 155(d) x 224(h)
Weights	1.32kg	1.83kg	2.08kg

Included Items

Supplied in Box	102mm Continuous Black on White Label Roll (2meter starter roll) 51mm x 26mm Black on White Die-cut Label Roll (60 Labels) AC Cord, USB Cable, CD-ROM Containing Software, Drivers and user-guide	AC Adapter and Cord, USB Cable, Documentations
-----------------	--	--